

ICE FREE EAVE PANEL 8"


Our heat cable channels are designed for direct heat transfer or thermal conductivity. They can fit 11mm or 13mm heat cables.



Panel Shown with Decorative Cladding

ICE FREE EAVE PANEL 8"

Engineered Roof Deicing Inc truly understands your needs and concerns. Through precise engineering and extensive research and development, Engineered Roof Deicing has developed a line of products extremely effective and far more efficient than any other option.

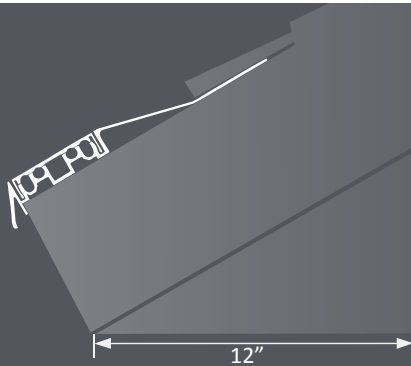

The 8" Panel helps protect roofs with eaves up to 12"

SPECIFICATIONS

Material Selection	♻️ Recycled Aluminum Alloy 6063 Temper - T5
Color	Decorative Metal Cladding Colors
Panel Size	8" x 5' or 8" x 10'—Designed to eliminate icicles and ice dams on roof eaves up to 12" wide.
Heating Systems	Commercial Grade-Self Regulating Heat Cable (8 Watt per foot in 100-130 VAC or 208-240 VAC). The 8" Panel requires 2 feet of Heat Cable per foot of panel. Designed for 11mm or 13 mm heat cables.
Components	The 8" (IFE-8) Heated Eave Panel System Includes Aluminum Alloy Snap Loc Top, Aluminum Alloy Base Panel
Optional Items	Ambient and/or Moisture Sensor Controllers, Self regulating heat trace for gutters and downspouts
Electrical Requirements	N.E.C. 426-28 requires 30mA Ground Fault circuit protection for snow and ice melting applications



Prevent Ice Dams with Ice Free Panels
Heat from the sun and warmth from the attic partially melt roof snow, creating a trickle of water which freezes at the roof's edge. If left untreated, ice dams and icicles can form.

The IceFree Eave Panel System melts and prevents property-damaging ice dams, the formation of dangerous icicles and heavy snow load. There's no longer a need to shovel and scrape away snow and ice.